

FIG. 1

1

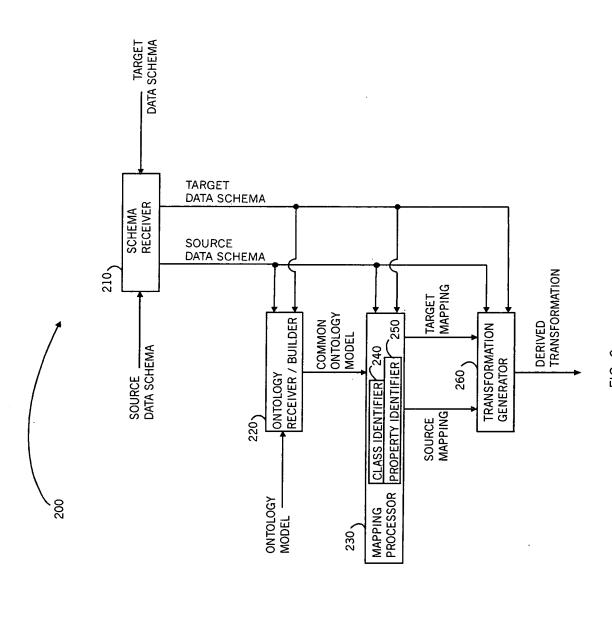


FIG. 2

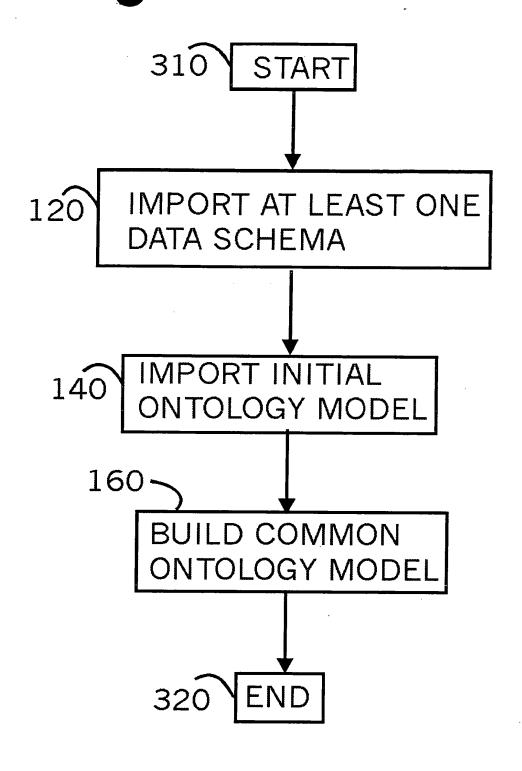
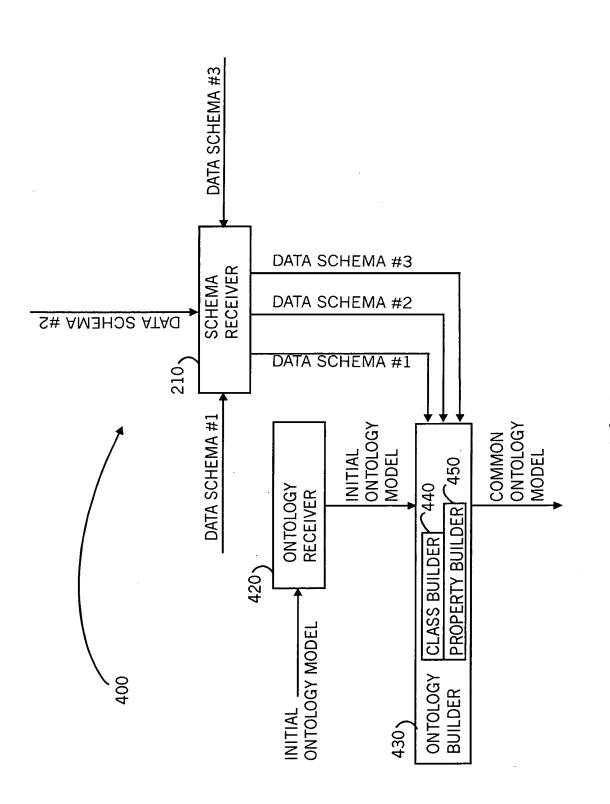


FIG. 3



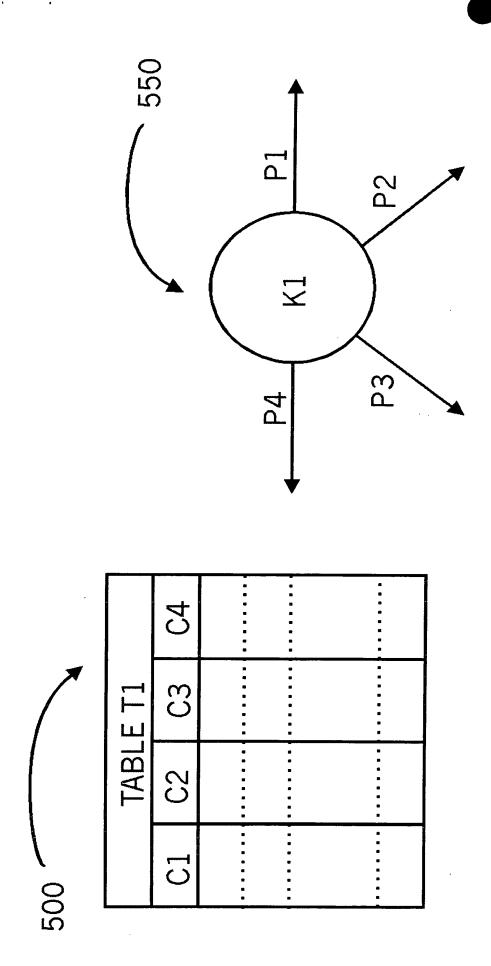


FIG. 5

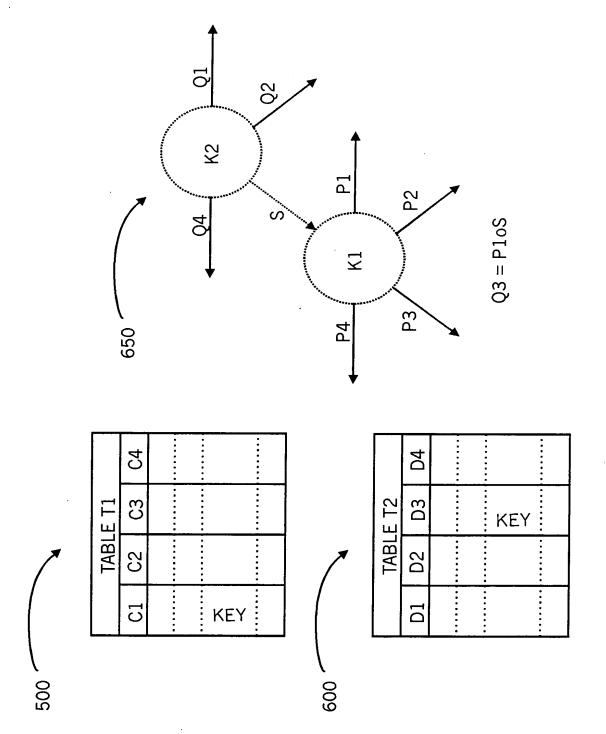
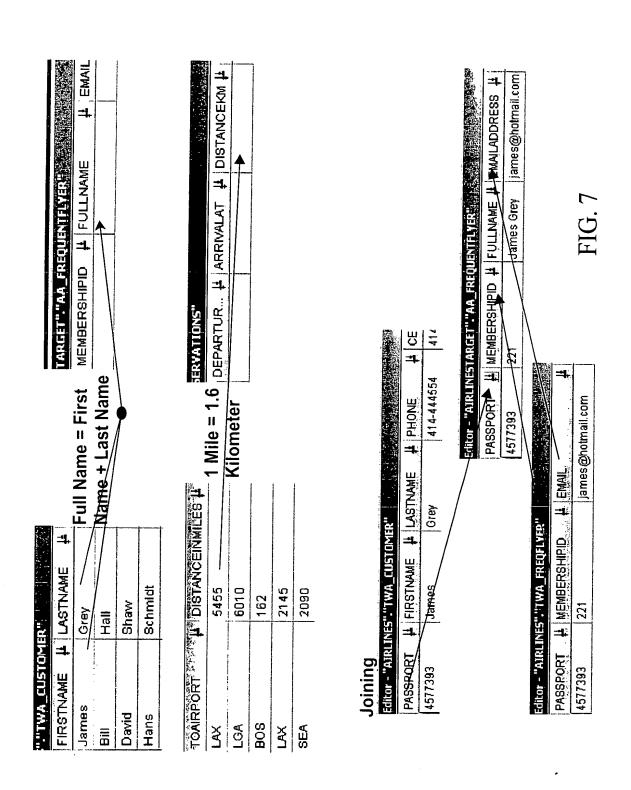


FIG. 6



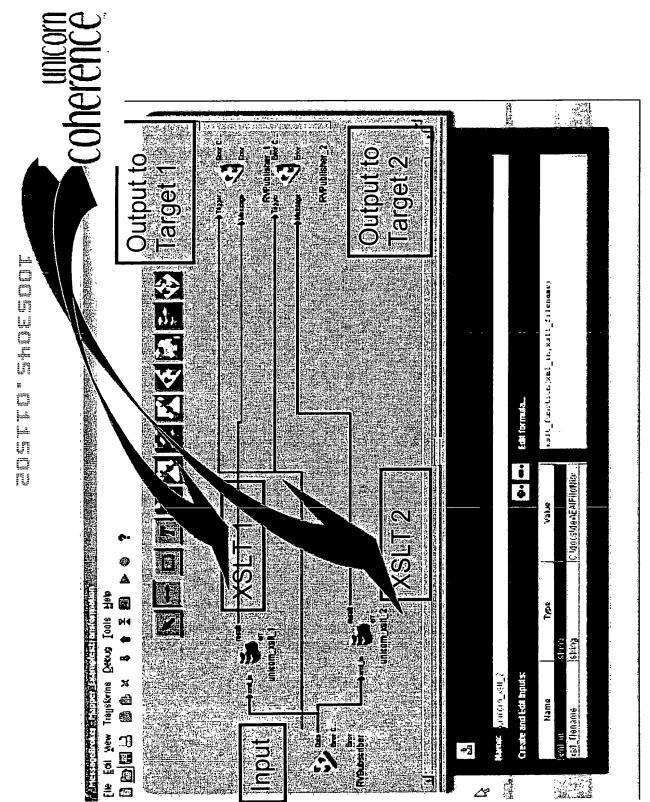


FIG. 8

FIG. 94

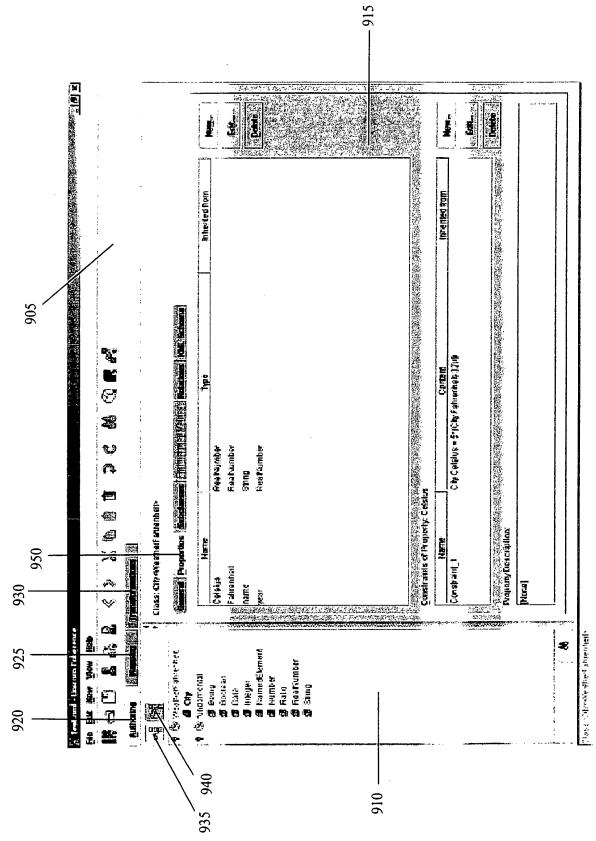


FIG. 9F

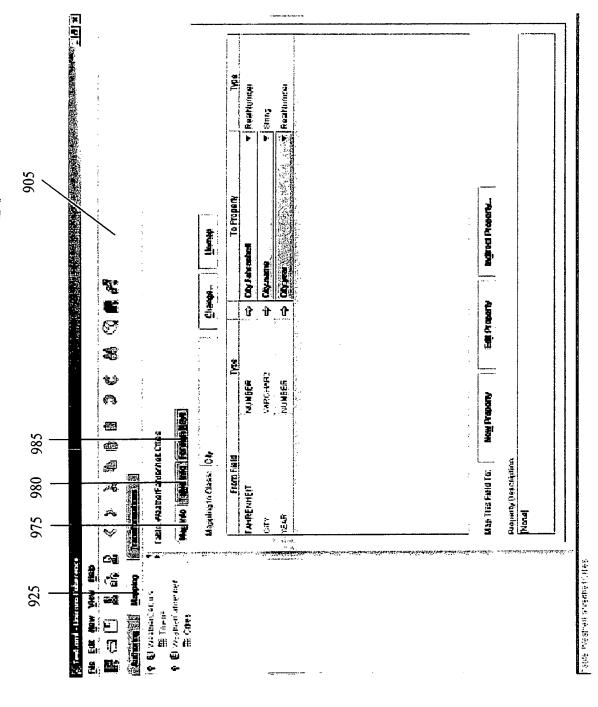


FIG. 9C

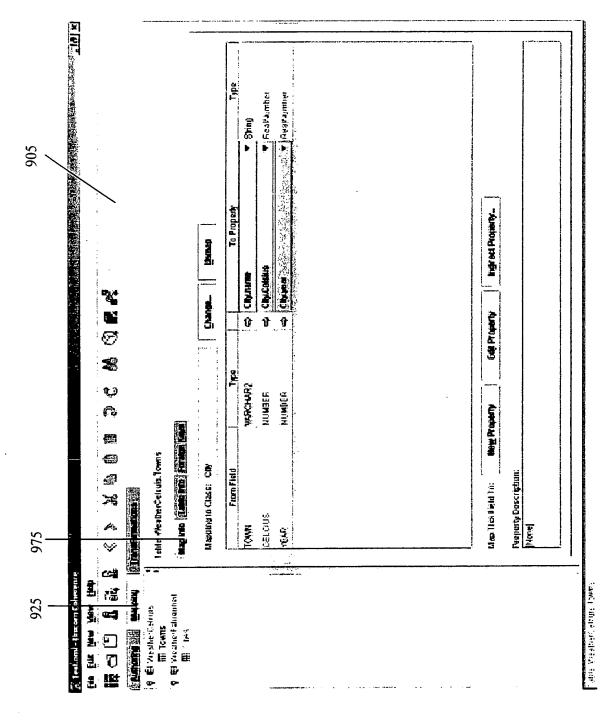


FIG. 9D

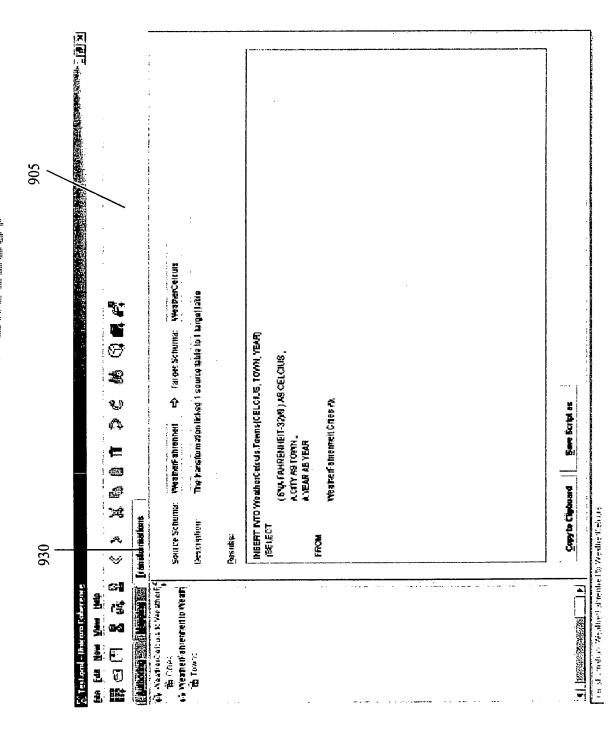


FIG. 9E

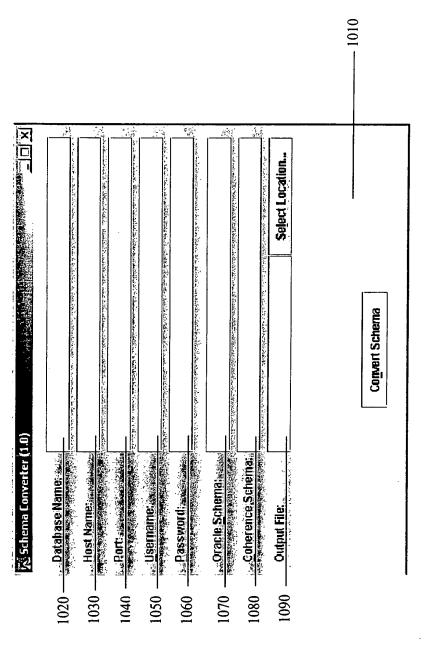


FIG. 10

Airlines Project Airlines Airline Airlines Project Airlines Airline Airlines Airlines Airline Airlines Airlines Airline Airlines Air	Inherited from New
Class: Date-fundan Class: Date-fundan Canonia Properti Name Name Mour Millisecond millisecond month second second Second Second Second Second Second Second Second Name	New Edit.
Class: Date-fundan Canoria Properti dayOfMonth hour millisecond minute month second second waar Constraints of Pr	New
Name Name dayOMonth frour millisecond millisecond month second second second second second second second second second Name	New Edit.
Mame dayOrMonth hour millisecond minute month second waar waar Name	New Edit.
ond ints of Pr	Edit.:
ond ints of Prame	Euft
ond Integer	
Integer Intege	and the state of t
Integer Integer Integer ints of Property; hour	
Interest traints of Property, hour	
	_
NAT.	
	No policies de la companya del companya de la companya del companya de la company
NamedElement Property Description:	
From 0 to 23	71.87
RealNumber	
1	
90	

FIG. 11A

Project Test instances B. XML Documents ASD Output L. Schemas B. Schemas	Class: Frequent Fly er « A Irline» Class: Frequent Fly er « A Irline» Name: Frequent Fly er Irline Class Description: Frequent Fly er information for all passengers.	TO THE INCIDENCE OF THE THE CONTROL OF THE CONTROL	1	? 917		971				が大変し							4	
Class: Frequent Fyer-A lutine> Section of the control of the contr	Class: Frequent Fyer A fullne> Suments Name: Figure 1 Frequent Fyer Frequent Fyer Frequent Fyer Frequent Fyer Frequent Fyer Fyer Frequent Fyer Frequent Fyer Frequent Fyer Frequent Fyer Frequent Fyer Information for all passengers.	New View Ite						-	***************************************				***************************************					Ì
Class: Frequent Fyer A Iriline> General Froquent Fyer Immediate Superclasses: Immediate Superclasses: Class Description: Class Description: Crequent Fyer Information for all passengers.	Class: Frequent Fyer-A tritine> Summentiale Superclasses: Frequent Fyer Information for all passengers.		ا الله الله	#	❖	₽	×								*	≅ ⊼*		
Immediate Superclasses: FrequentFlyer Immediate Superclasses: Class Description:	Name: Frequent Fyer Class Description: Frequent Fyer Information for all passengers.	88 Airlines Project © !!! Airline Integration	7	ວຶ	388: Fr	uanba	Flyer∢	A irline	Å									
Frequent Flyer Frequent Flyer Information for all passengers.	Frequent Fyer			(ত্র	eneral	2	Sapla	Sep	SSE	2								-
Frequent Fyer Immediate Superclasses: Class Description: Class Description: Frequent Fiver Information for all passengers.	Immediate Superclasses: Immediate Superclasses: Immediate Supercl	公 XSD Output	2,4,04,4,10		Name:													
Immediate Superclasses: Information for all passengers. Frequent Flyer information for all passengers.	Immediate Superclasses: Frequent Flyer Information for all passengers.	O-晓-XML Schemas O- 약e RDB Schemas			Freque	antF ly (_								,		Edit	
Being Ahrline	## Annoted Passenger Page				mmed	iate Si	gerck	ses:	••									
Being Antine Antine Antine Antine Person Person Person Person Person Class Description: Branchumber Class Description: Bratio	Being Afrina Afrina Person Pe		-	3													Add	- j
Being Arrhine Flight Person Pe	Being Alline Airport Flight Person Pe	CONTROL SAN	I IV	724 744													Seminor	and the same
Arline Arline Ariport Flight Person Person Prosessenger Reservation Reservatio	Arline Arline Flight Person Person Processerger Reservation Rese	Being	4															
Flight Person Person Person Person Person Person Person Person Personalion Per	Flight Person Pe	Arline Armon																e (the sec
Person Passenger Frequentifyer PhoneNumber Breservation Breservation Breservation Breservation Breservation Breservation Breservation Breservation Call Breservation Call Breservation Call	Person Passenger Frequentifyer PhoneNumber Reservation Reservatio	Flight																10 M
Frequentifyer PhoneNumber Reservation Res	## Frequentifyer Frequentify		****															
PhoneNumber Reservation Colors Number Restring String NamedElement	## PhoneNumber California C		大學 中心 中心															
Reservation CI State Ratio String NamedElement	Reservation CI BB Date BB Number BB Ratio BB String BB String BB NamedElement	PhoneNumber	N/M	rd on			4.7	MET W.	不改造	传统			· 大学		1		は特別が	
Ba Date Ba Number Ba Ratio Ba String Ba NamedElement	Ba Date Ba Number Ba Ratio Ba String Ca NamedElement				Class	Descri	otion:											_
A Ratio Ratio Ratio Ratio Ratio Ratio Ratio	Stand String Str	63 6	uuung T	-0.1 - 2 - 3	Freque	ant Fly	er info	rmatio	n for	all pass	enger	, si						
SB String SB NamedElement	String String MamedElement	969		建筑														्यक्ताः शहरूकुर
S NamedElement ♣	SB NamedElement ►	String				A CONTRACTOR OF THE PARTY OF TH			· Program		14 5 C	NEW YEAR	16 at 15 at	(A) (Cell)	100		123	, , ,
**	*	(2)									*							
		**																
					The second secon				1		111111111111111111111111111111111111111							

FIG. 11B

tooswors olivor

🔏 Airline Integration.oml • Unicorn Coherence	t egration.	orini .	Umite	orn Col	nereno	9,				Windows Inc.						NAME OF THE OWNER, OWNE	X O -
File Edit New View Help	Jew Viev	y Kel	ď						-								
	-% ■				*	\$ ₹\$	×			(F)	(1)			**	* 0*		
88 Airlines Project 9 IIII Airline Integration	roject 18 Integrat	ion		Clas	Class: FrequentFlyer <airdemo></airdemo>	yuentF	lyer<.Ai	ı.Dem	<u> </u>								
	Test instances	Se		2	wado 💢										· 自	X	
 6 의 생 ×	O-Man XML Documents 公公 XSD Output	cumer.	ত 		Look in:		☐ models	ges				•	4	<u> </u>			
O- No KML Schemas O- No RDB Schemas	Schemas Schemas				AirlinesSample.oml	SSamp	le.om										New
		* 10.87E			」 ElectronicComponents.oml 】HR.oml	onicco	mbout	ints.or	<u>=</u>								Delate
					T.oml												
	inge Calab				TemperatureSample.oml	arature	Samp	e.om									
A Airline	e e		15														第二次 第二次 第二次 第二次 第二次 第二次 第二次 第二次 第二次 第二次
Airport 60 Flight	\f =							10000000000000000000000000000000000000		西班牙		THE COLUMN					
	uo.		- }		File name:	66	Airlin	SSam	AirlinesSample.om	<u> </u>	*	The same of the same	المرابية المتعاقبة والمعادمة	A Wash		Open	New
1 W	FrequentFlyer	ntFlyer	e and an and an an		Files of type:	ype:	Orto	M. File	OntoML Files (.oml)	=				•		Cancel	E
	PhoneNumber			-													Delete
Rese	Reservation Date			ā	Property Description:	Desc	ription									_1	
O G Number	lber			UE	The airline of membership	ne of n	nembe	rship									
String String	- <u>-</u>																
o ta Nam	NamedElement	_	I														
		* 0	₩	George de la													

FIG. 11C

	Air	line Int	$ec{E}$ Airline Integration, oml \cdot Unicorn Cohereince	30.OU	-	Jnic	orn C	ohere	900				2000年								XUI-	X
-	File Edit		New View Help	Me	물			-				ļ										1
- ALLEN SAN				=73			4	*	øÅ.	×	_						₹	*	≅ _*			
EI CHI	の問	මුසි Airlines Project ඉ 🛗 Airline Inte	Airlines Project	ration		¥ A 3.0.	් ඊ	iss: Pe	Class: Person <airdemo></airdemo>	AirDen	ê											
	6 -		Test Instances - B XML Documents	ocur Docur	nents		رق		Congral Properties Subclasses	erties		1985	ia.									
		× \$3	SD Out	ᆵ				Z	Name	-				Type				Inherit	Inherited from		Money	
	6-6 8-8	XML:	🌳 🕵 XML Schemas 🍑 👣 RDB Schemas			e a sajáriga		age SecolPhone		ig g	Integer PhoneNumber	mber	: 1						I NO.	42		34.5
								email frstName	ue u	Str	String								34331333132		Delete	o marine
ilc.	銐		Ď.					fullNar	fullName	₽8		September 1	Sting with the property of the		ない。		神学学院	120				(al
	Being S	all Bula			14.74			gender SeilastName	g	Ge Str	Gender String											mar in
		Airline	o t				it.	Constr	Constraints of Property, fullName	T Prop	erty. ft	IINan	services and services and services and services and services and become the services and services are services and services and services and services and services and services are services are services and services are services and services are servic			1.45			A. 486 70 L.		がに対象が	e!
		Flight	=			*			Name					Content				å	Inherited from		Nova	
	63 € ⊙-		u	į		121212		Consti	Constraint_5		erson.1	r III	Person.fullName = Person.firstName " P	erson.	firstNar	me II "	-H-			'		
		9	Passenger FrequentRye	e de la	<u>\$</u>	14004														· (4)		100
			PhoneNumber Reservation	Je.		#8¢.		Oroper	Property Description:	criptio	H H										Delete	SVE SA
	87 € o	Son Date	ber			ne ne		Persor	Person's full name (first + last))ame	first +	last)										
	UZS	🗷 Ratio	_																			
	09 E37		String	ţ																		
) H		Hatana			▶	1															7
					≉ 8																	
 ;																						

FIG. 111

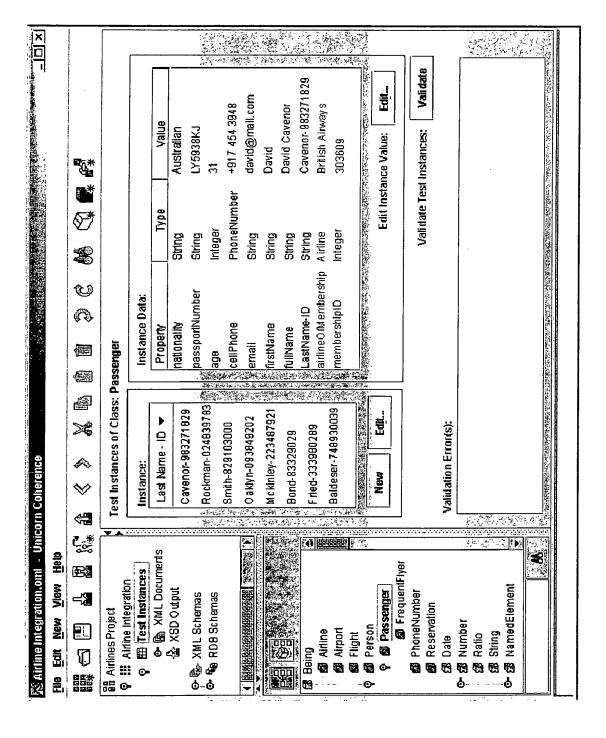


FIG. 11E

```
elementFormDefault="qualified" attributeFormDefault="unqualified">
                                                                                                                                             <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"</pre>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                <xs:element name="distanceInMiles" type="xs:float" />
                                                                                                                                                                                                                                                                                                                                                                     <xs:element name="securityLevel" type="xs:string" />
                                                                                                                                                                                                                                                                                                                                                                                                       <xs:element name="flightOccurence" type="Journey"</pre>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          <xs:element name="flight" type="Journey" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          <xs:element name="departure" type="Airport" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  <xs:element name="airline" type="Company" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   <xs:element name="take-off" type="xs:date" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      <xs.element name="arrival" type="Airport" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                minOccurs="0" maxOccurs="unbounded" />
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      <xs:complexType name="FlightReservation">
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  <xs:element name="id" type="xs:string"
                                                                                                         <?xml version="1.0" encoding="UTF-8" ?>
                                                                                                                                                                                                                                                                                           <xs:complexType name="FlightInfo">
                                                                                                                                                                                                                     <xs:element name="customerOrder"
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 - <xs:element name="flightInfo">
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          <xs:complexType name="Journey">
                                                                                                                                                                                                                                                         type="FlightReservation" /
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  </xs:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     - <xs:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 <=/x>:sedneuce>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         <a>>edneuce></a>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   </xs:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  </ks:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             </xs:element>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    <eoundas:sx/>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   <eoundas:sx/>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                - <xs:sedneuce>
                                                                                                                                                                                                                                                                                                                                      < <x2; sedneuce>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          <a>capuence>
                                    - <*s:schema xmhs:xs="http://www.w3.org/2001/XMLSchema"
                                                                     elementFormDefault="qualified" attributeFormD
                                                                                                     <xs:element name="reservation" type="Reser
                                                                                                                                                                                                                     <xs:element name="flight" type="Flight" m
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   <xs:element name="departureAirport" typ
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         <xs:element name="startTime" type="xs:d
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        <xs:attribute name="flightID" type="xs:strin
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    <xs:element name="passenger" type="Pa$
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          <xs; element name="distanceInKm" type='
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    <xs:element name="flights" type="Fl
                                                                                                                                                                                                                                                                                                                                                                                                                                              <xs:element name="airline" type="xs:strir
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              cxs: attribute name="reservationID" type=";
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  <xs:element name="arrivalAirport" type=
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  - <xs:complexType name="Reservation">
<?xml version="1.0" encoding="UTF-8" ?>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      - <xs: element name="flightInfo">
                                                                                                                                                                                                                                                       maxOccurs="unbounded" />
                                                                                                                                             - <xs:complexType name="Flights">
                                                                                                                                                                                                                                                                                                                                                                   - <xs:complexType name="Flight">
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        </xs:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            - <xs:complexType>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          </xs:sedneuce>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  <a>>:sedneuce></a>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              </ks: complex Type>
                                                                                                                                                                                                                                                                                                                                    </xs: complex Type>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     </xs:element>
                                                                                                                                                                                                                                                                                                </ks: sedneuce>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        </xs: sednence>
                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             <//xs: sedneuce>
                                                                                                                                                                                    - <xs: sedneuce>
                                                                                                                                                                                                                                                                                                                                                                                                              < cxs: sedneuce>
```

FIG. 11F

British Airways Schema

<xs:element name="commuter" type="Commuter" />

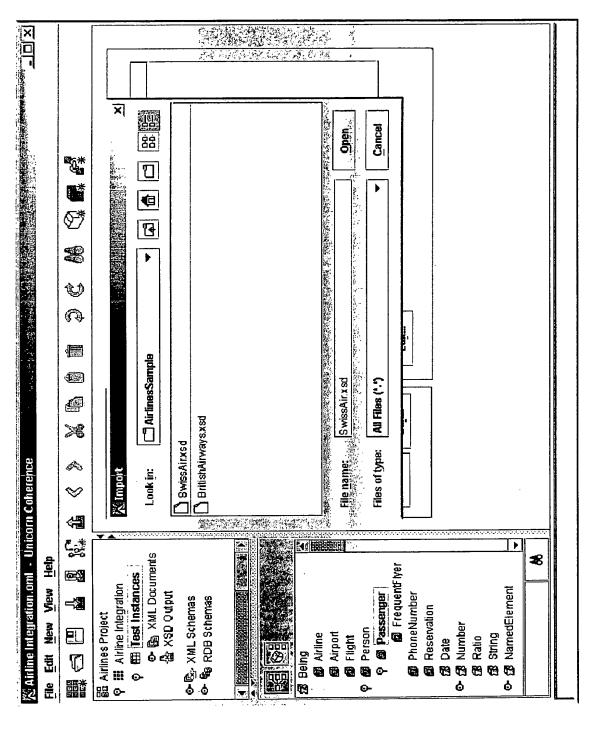


FIG. 11G

낅					_			(A) (737 . 			1							
				rties:				•											
		*		Default Map Properties:	Default Mapping	To December	lupany							ないからなけんのは対象が、意味を含むまたのなどの理解を影響を影響を表現をあるというないのでは、	Unmap Property				
						F	3												
					<u>U</u> nmap			bed>	ped	<ped><ped< p=""></ped<></ped>	kped≯	<ped <<="" th=""><th>≼pad</th><th></th><th>serty.</th><th></th><th></th><th></th><th></th></ped>	≼pad		serty.				
								<unmapped></unmapped>	≺unmapped⊳	<unmapped></unmapped>	≺unmapped≻	≺unmapped≻	≺unmapped≻		Edit Property				
18.8		U			_1			₹			·		₹		Edi				
TIME STATE		(P			Add	_	·	企	企	Î	飠	Û	얍		ح ا				
の主義を表現						9		pany	<u> </u>	Ĕ	aţ	ring	ate	(A)	Existing Property				
						ļ.	•	Company	Airpon	Airport	xs:float	xs:string	xs:date	1111	sting F				
			n mey				1				88				Exis				
		*	e. Jo	ij						• 📶 departure	ii iii				ح ا				
e,			exTyr	o Clas	pa	200		airline	īī ′ ≥	partur	tance		e off	Field	прец	불			
erenio		80	omp:	Mapping to Class:	Unmapped	-	1		o em antival	a a∰a	els Glass	<u>∘</u>	襲	Map This Field To:	New Property	Description:			
n Col		以后的 《》	Map ComplexType: Journey Mapping Schema mo	Map	트			6	δ	<u>ŏ</u>	1.	1,4,731		Mag	2	Des		_	
Inico		~= C.j∰	4 1 2000000	<u> </u>		-	۱ ا	E D				A	and the same				*****	···········	
	물	•~• •≈3	-	Sillallis	SA] [20000000					5	=						
0L.00	View.		ration	tout	as Airwa	ping		3			<u></u>	ייני מינים מינים	3 6 6						
egrat	Edit New View Help		nes Project Airline Integration ⊞ Test Instances	S XSD Output	中央 XML Schemas 中央 British Airways	Dupde M &		A Complex Types	200	at Info	O- G- Journey	Eliabt Decoration		er to	LI DO				
ine Ini	¥		ines P Airlint ⊞ Te	# ₹ \$ c \$1	M M M			mple	2002 644	R Flight Info	Jour			A Airport	🔂 Person				
🔏 Airline Integration.om) - Unicorn Coherence	File E		記 Airlines Project 今 舗 Airline Integration ゆ 価 Test Instances		⊕ ◆	Sirkii V	P	13 18			Ó	0	3 (1)						
<u> </u>							۱. ت				-	- 7							

FIG. 11H

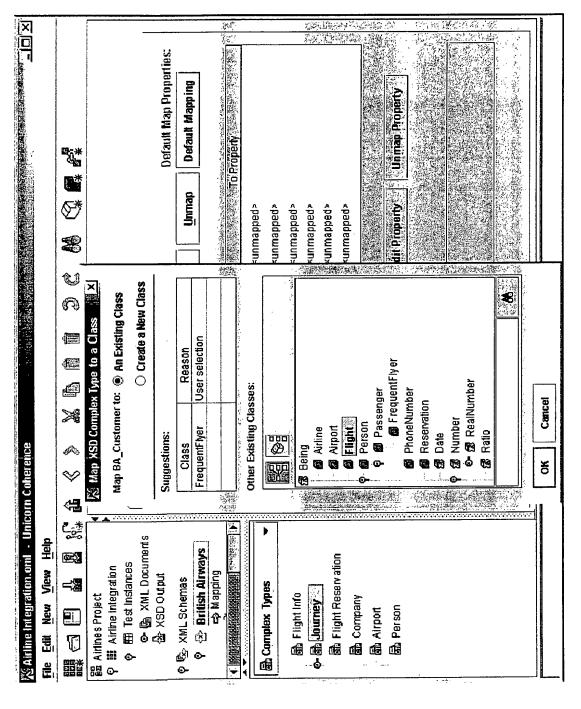


FIG. 111

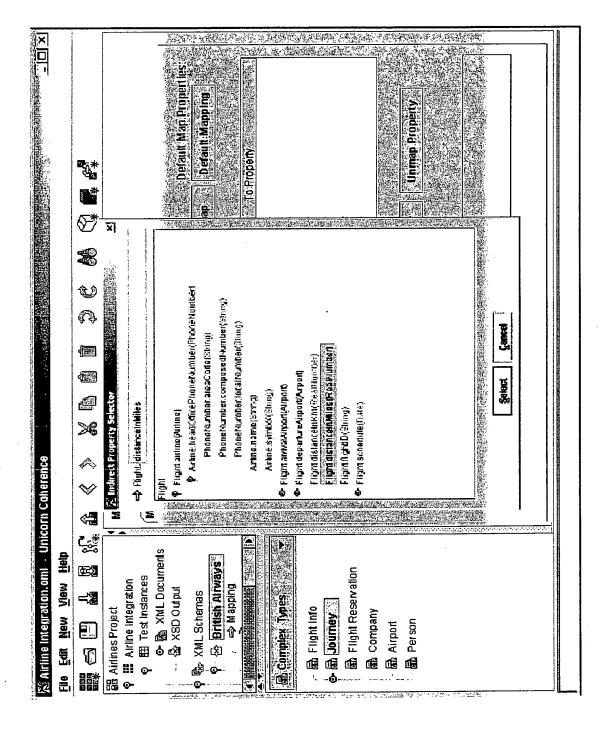


FIG. 11K

🕅 Airline Integration.oml - Unicorn Coherence	egration	- limo.	Unic	Jrn C	oherer	ce			No.						X U
File Edit N	New Vie	View Help	a												
				4	⊗		*			(T)	U			*	
BB Airlines Project	roject e Integrat	ion	V A .:	Mag	Com	Map ComplexType: Journey	e: Jo	irney							
⊙ -	E Test Instances	ces	<u> </u>	Mag	ping	Mapping Schemalinio	appo	Transfered							-
₩ ×) ⇔} ————	A XSD Output		<u></u>	E	apping	Mapping to Class:	;;							Default Map Properties:	:Si
♀ 感 XML Schemas	Schemas		enivers.		Flight				•	4	Add	31	Unmap	Default Mapping	
	Co Mapping	rways 1g		!		:									
		150				From		П	Type					To Property	
				34	우四 airline	Hine			Company		· •	<unmapped></unmapped>	Ą		4, 4°,
	x lynes				🍦 🚌 arrival	rival			Airport		· 仓	<unmapped></unmapped>	< p 6		
Flight Info	ht Info		37474574		帽	o-ह्या departure	6 0		Airport		·	<unmapped></unmapped>	ð		4. 30
Annor de	MBV		<u> </u>		o d	stance	il mil	98	en distance in miles xs:float	3 T-	个	light dist	ancelinM	Flight distance in Miles (Real Number)	
	Ellaht Decemation	40	******		PI 🕮				xs:string		· 合	<unwapped></unwapped>	6		教
The Commons			Ta Tabatatat		. 🔂 take off	ike off			xs:date		Ŷ	<unwapped></unwapped>	-		
Airport	train,				ap Thi	Map This Field To:	10:						TO BE	等 國 医乳毒素 医腹腔 经营销货 医肾	
配 Person	uos Sou		1000000		New	New Property		Exis	Existing Property	operty	ŭ	Edit Property	≩	Unmap Property	
				<u> </u>	Description:	: :: :::::::::::::::::::::::::::::::::									
					he airli	The airline company name.	pany	name.							
			147479747479797												
			*******												<u> </u>

FIG. 11L

😿 Airline Integration.oml - Unicorn Coherence	E S	orn C	oheren	93			6. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	7.44 July 2.14	(4) A 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					X III
File Edit New Yeaw Help														
職与日 4 2 5 6		4	♦		×				v A			*	≅ 7*	
BB Airlines Project ② iii Airline Integration	V A :	<u>E</u>	Map ComplexType: Journey	lexTyr	e: Jo	urney								
• Ha Test Instances	•	E E	Mapping Schema Mo		o lui	[Belleville								
S XSD Output	n ´	2	Mapping to Class:	to Clas	ķ							_	Default Map Properties:	
			Flight						Add		Unmap		Default Mapping	
Wapping Wapping		<u>!</u>	=					 						
				From			Туре					ToP	To Property	_
A Total control of the control of th			O-File airline	rline			Company	any	仓	alrline(airline (Airline)			
an complex lypes	>	- j	🌣 🔒 arrival	rival			Alrport	=	Ŷ	arrival/	arrivalAirport(Airport)	rport)		
Flight Info	-rieselfese		o- 🚮 departure	epartur	80		Airport	L	Ŷ	departi	departureAirport(Airport)	(Airp	ort)	in Est.
Neurona de la company		ì.	<u>6</u>	stance	Ē	S	xs:float	at at	Û	Filght (listancelr	ìM ile≾	Flight distance InMiles(RealNumber)	13.77
		4 C. T.	Di				xs:string	ing	Û	flightID	flightID(String)			
THOM RESERVATION			18	🔂 take off			xs:date	e	1	schedu	schedule(Date)			
A Airport			fap Thi	S Field	T0.	Marie The Control of			No.				App This Field To:	िंद्य <u>ः</u>
R Person			New	New Property	2	EX	Existing Property	ropert		Edit Property	perty		Unmap Property	
		<u> </u>	Description:	ion:										
			The airline company name.	ne con	npany	name								,
										:				

FIG. 11M

🛣 Airline Integration.oml - Unicom Coherence	ntegra	fion.o	iii	Unic	orn Co	heren	. 93			14	· · · · · · · · · · · · · · · · · · ·						X I
File Edit New View Help	New	<u>View</u>	물														
		<u>1</u>	8 4.	C. 25	€	₩	A	*				O		3	€		
명 Airlines Project 후 🚟 Airline Integration	Project ne Intec	t gration	_	V A.	Map	Comp	Map ComplexType: Journey	e: 50	urney								
	冊 Test Instances の	stance: L Docu	s ıments	40			Mapping Schema Info	a Info									
© ® XML Schemas	Scher	mas		<u>Cayaba</u>			Name			Type		MIN	Мах	Use		Value	
(∳)	British Airways	Airw	ays	AN U.A.	0	o 🛗 ai	aidine			Company	arıy						
-	小 Mapping	pping	; !	erent.	o	₫ ₽	rival			Airport	E						¥.
					•	e de	◆品 departure	۵.		Airport	F						<u> </u>
						- 6	🖺 distance in miles	in mile	98	xs:float	Ħ						<u> </u>
ST) Complex Types	WI Xe					<u>48</u>				xs:string	ng						da e
	Right Info	_		en e		and ta	🔂 take off			xs:date	e						
o- & Journey	urney	[g.]		******													9.5
G Flight Reservation	ght Re	serv ati	ē	egailge				1						· · · · · · · · · · · · · · · · · · ·			
E CO	品 Company			(*,*,*,*,*			•		•	; i	!		i i		·		
Airport	port			e de la composición dela composición de la composición de la composición dela composición dela composición dela composición de la composición dela comp													
쥂 Person	rson																
				ilinorac _i o.													
1 11-2																	

FIG. 11N


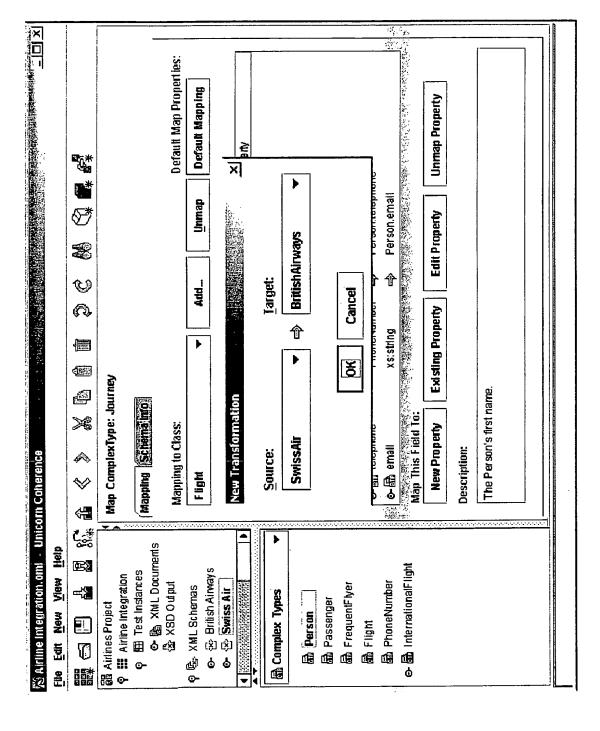


FIG. 110

松 Airline Integration.oml - Unicorn Coherence	Unic	orn Co	herence	Company of the Compan		×
	C		*	X B B B D C		
P	S	Nos	Source:	Swiss Air Target:	Target: British Arways	
		Des	Description:	The merging of the British airways and Swiss Air XML schemas	s and Swiss Air XML schemas.	
● 役 British Airways ・ 窓 Swiss Air ・ Mapping			Update	Regenerate transformation to reflect changes to model	changes to model	
	9	V A	7 xml versio	xml version="1.0" encoding="UTF-8"?	1	1
たらかがみま物がどうながらればない。 ないとのできま物がある。		· ·	xsi:styleshi xsi:output r	<xsi:stylesheet .0"="" version="1" xmlns:xsi="lttlp://www.w6.org/1999/XSL/frensform"> <xsi:output .0"="" encoding="UTF-8" indent="ves" method="xml" version="1"></xsi:output></xsi:stylesheet>	org/1999/XSL/Transform"> -8" indent="yes" />	
		マヤ	<xsi:template n<="" td=""><td><pre><<si.tem match="/" plate=""> </si.tem></pre></td><td></td><td></td></xsi:template>	<pre><<si.tem match="/" plate=""> </si.tem></pre>		
		v v	<xstapply-temp< p=""></xstapply-temp<>	<xst apply-templates="" seled="oustonerOrder"></xst> < Reservation>		**************************************
	EMP A	∀ Y	< Astremplate>	<pre></pre> <pre><xsi:tem match="custom erOrder" plate=""></xsi:tem></pre>		
		CEAS.	xsr.elemen xsr.apply-te	<xs:element name="flightlinb"> <xs:apply-templates seled="flightlinb"></xs:apply-templates>></xs:element>		
		A .	< /xst:element> <xst:element n<="" td=""><td>< /xstelement> < xstelement name="passenger"></td><td></td><td></td></xst:element>	< /xstelement> < xstelement name="passenger">		
	1. J.	v v	xst:apply-tem; xxst:element>	<xsi:apply:templates \="" select="commuter"> <xsi:element></xsi:element></xsi:apply:templates>)-/E,
		V V	< Assistemplates	< Astrtemplate> < xsi template match="flortin to">		
		¥ V	xsi:elemen xsi:for-eac	<xst element="" name="flights"> <xst each="" for="" select="flight"></xst></xst>		1,00
	1543	* v	xsi:eleme⊓ xsi:cell tem	<pre><xsi:element name="flight"> <xsi:cell.4emplate name="flight"></xsi:cell.4emplate></xsi:element></pre>		T.,
第四次は原本を指する アイス・アイン	*	Ī		Commence of the substitute of		1
			Copy to Clipboard	board		
	l	۱				

FIG. 111

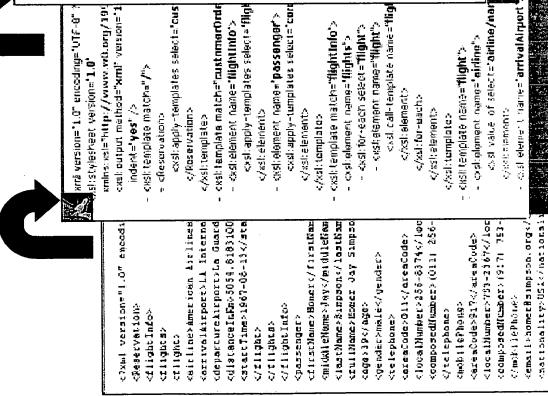

-customerOrder xmlns:xs1="hctp://www.w3.org/2001/XKLSchema-1ng" Corporate in cinformationNumbers (718) 356-97344/info <!--asaple XML file generated by XML Spy v4.0 U (http://www.xm. cteonOftocation>Los ingeles</tounOftoca <airportHame≻Lk International</airport <informationNumber>(301) 263-8991</infe
</pre> <tconfortlocation>New Yorks/toonOfflocatio ceteportName>La Guardia</br/>
//eitportName> cdistance inflies>3141.50c/distance infiles> enarge Areticen Airliness/names cphone>(212) 591-3411 Affaxy (3.12) 591-34124/faxy camplificate>Homer day Simpsons/fullifame> CCCKG-011/1867-108-13/CCKG-011/ <a href="mailto:re <symbol>LAXe/symbol> <a yright | AA yright | AA <?mm! version="1.0" encoding="UTF-6"?> </department <departure> s/arrayal> c/niritnes carrival> sairland <8ge>39</e> < fillight> */Tlightinto> <fli>drightinfo> <commuter>

FIG. 11Q

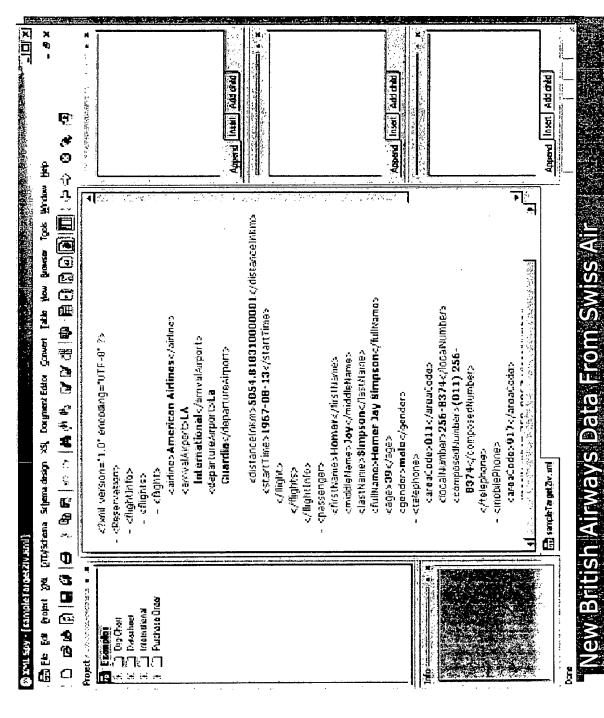


FIG. 11R

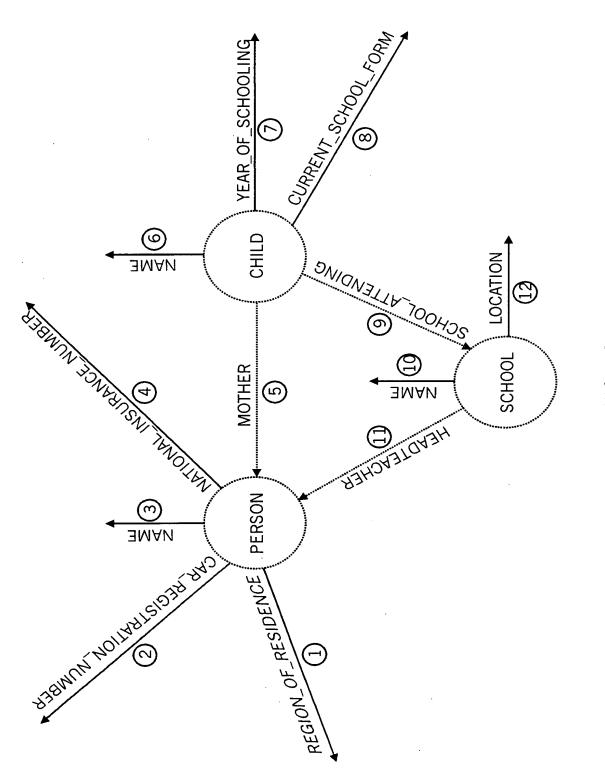
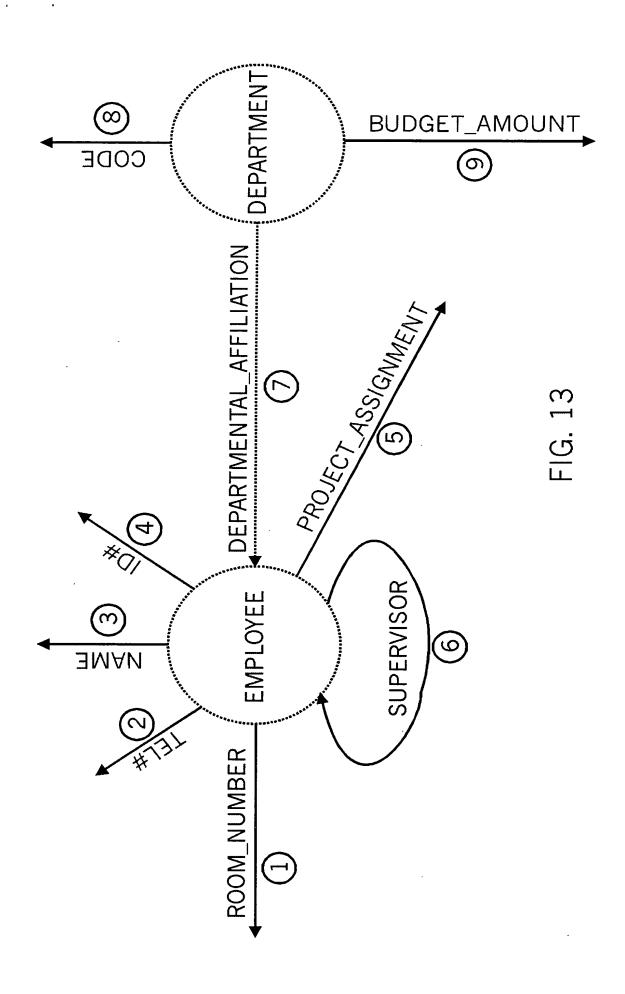


FIG. 12



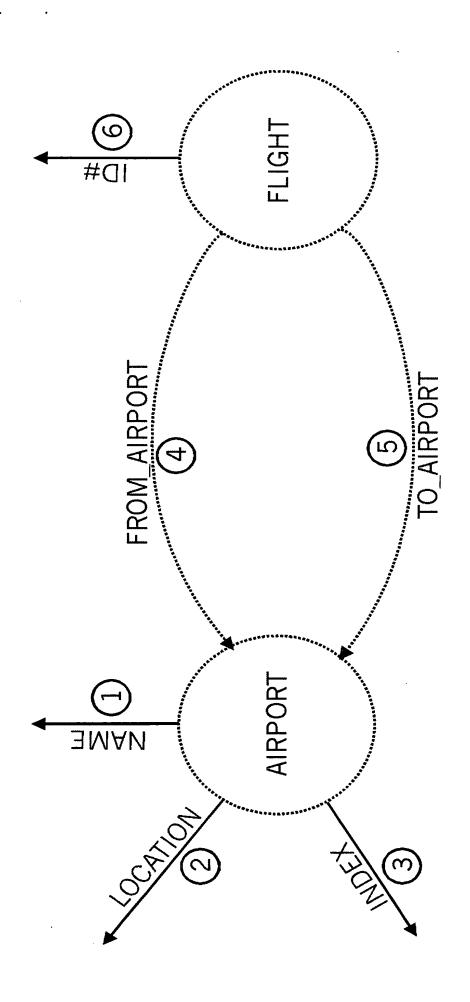
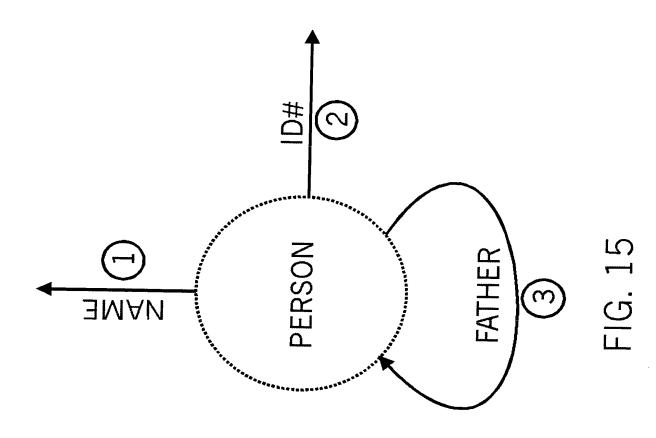


FIG. 14



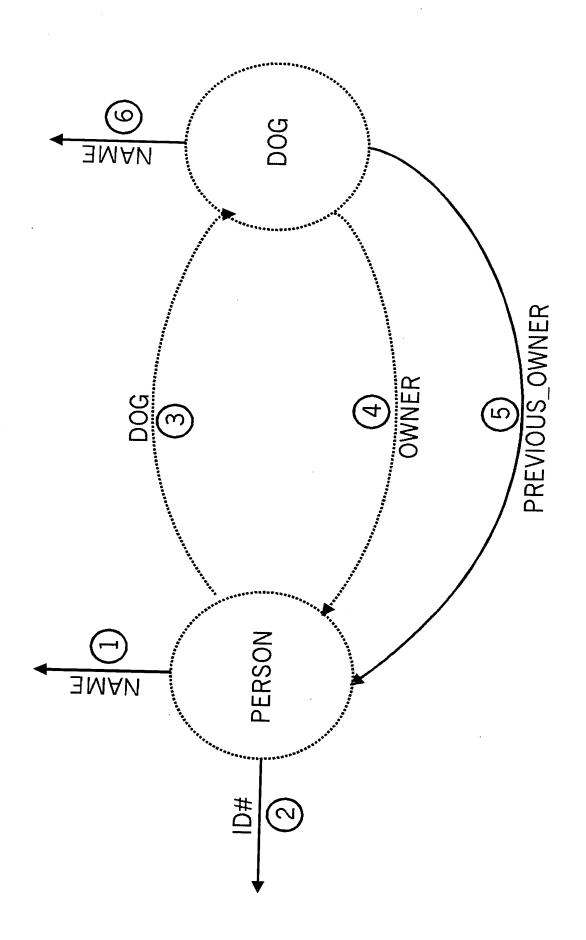
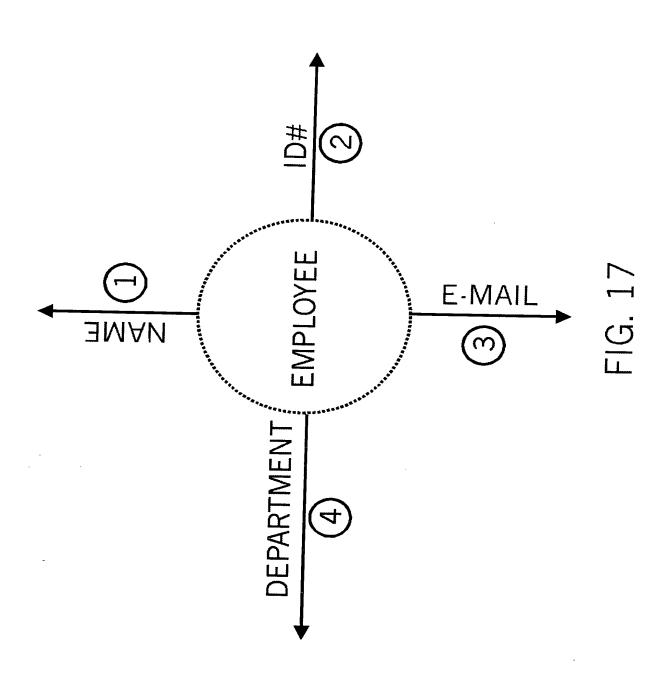
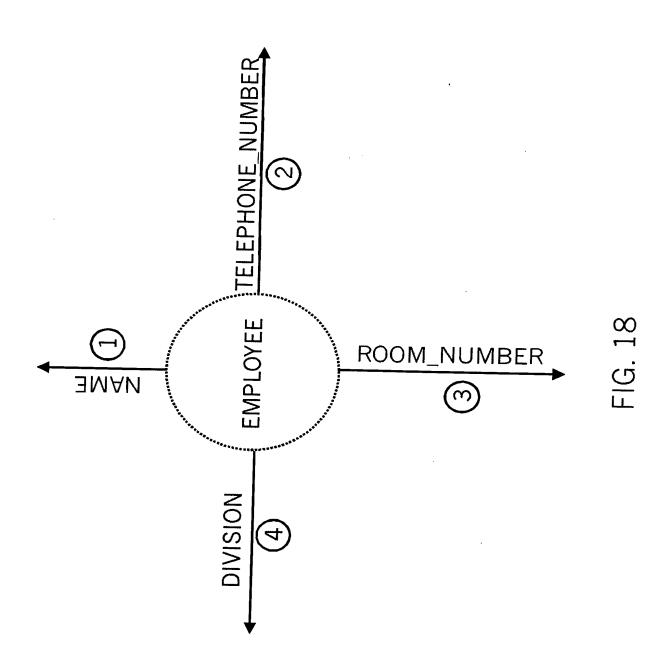
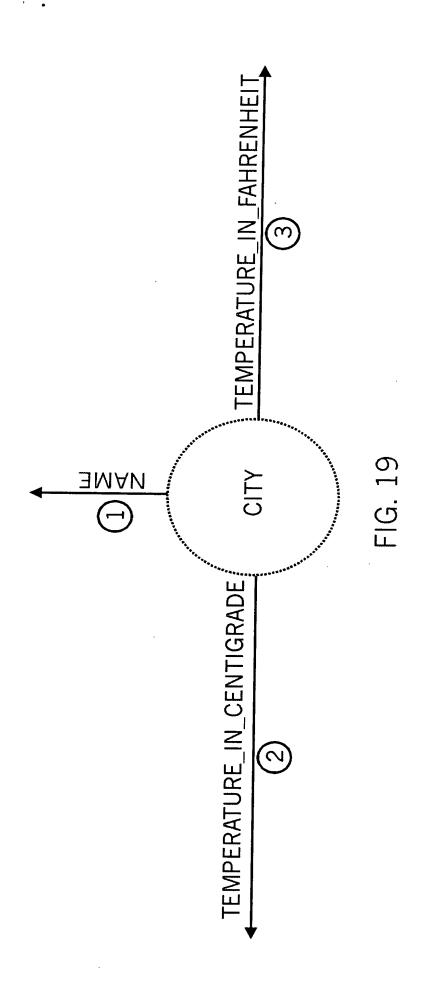
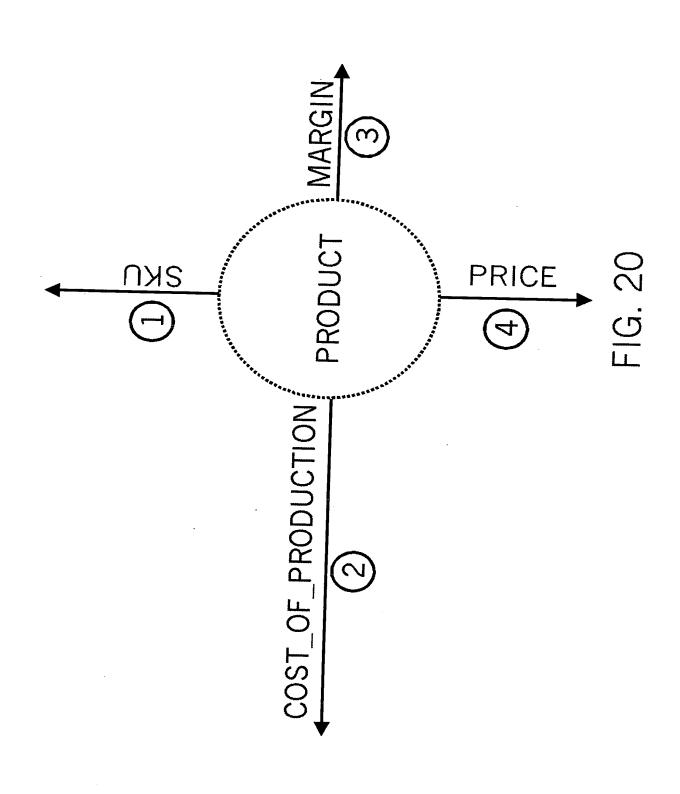


FIG. 16









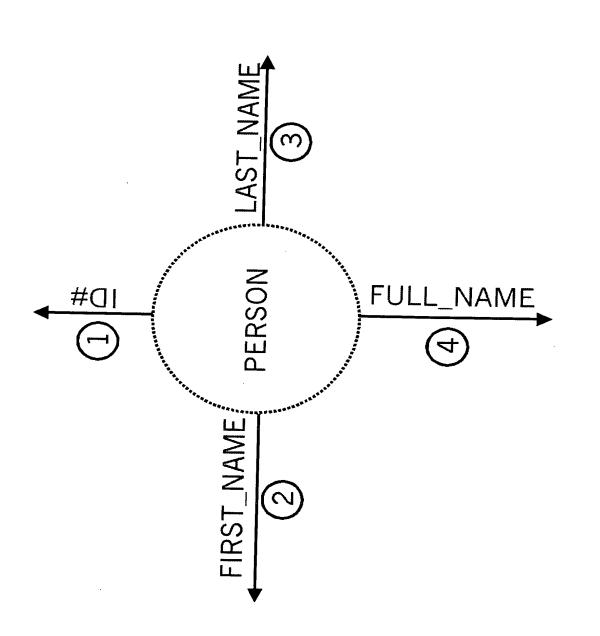


FIG. 21

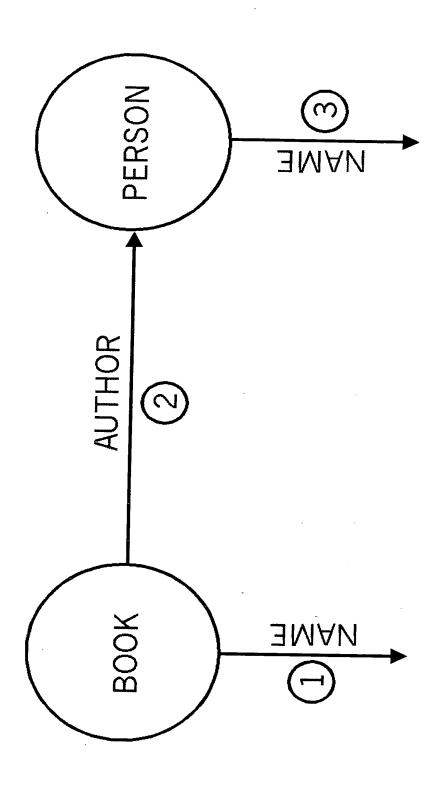


FIG. 22

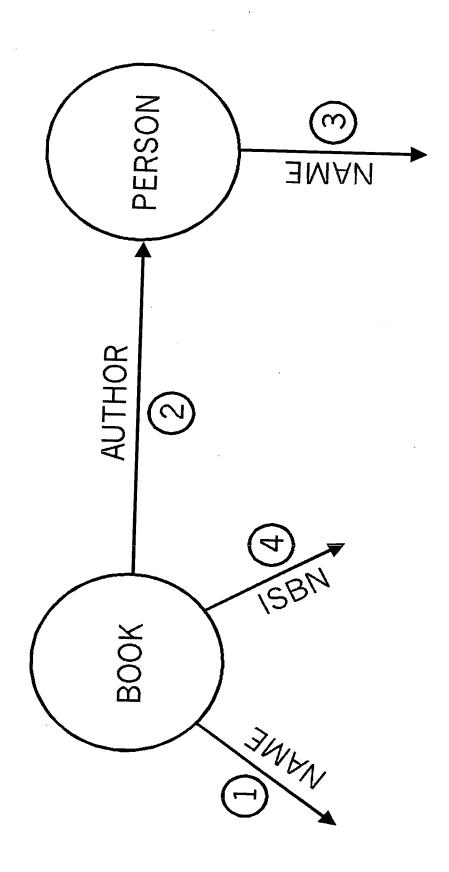


FIG. 23



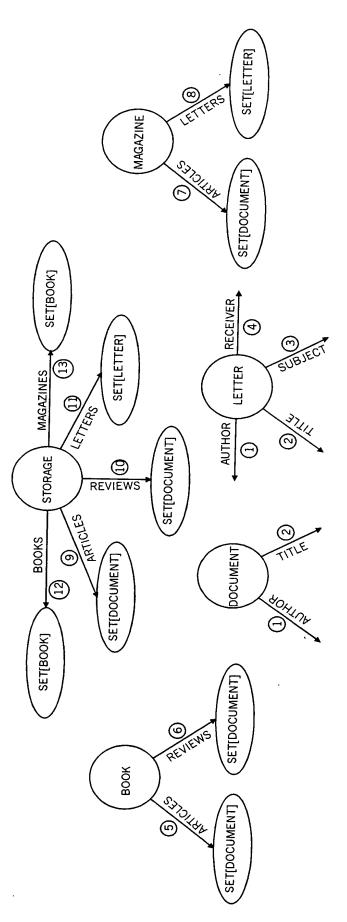


FIG. 24

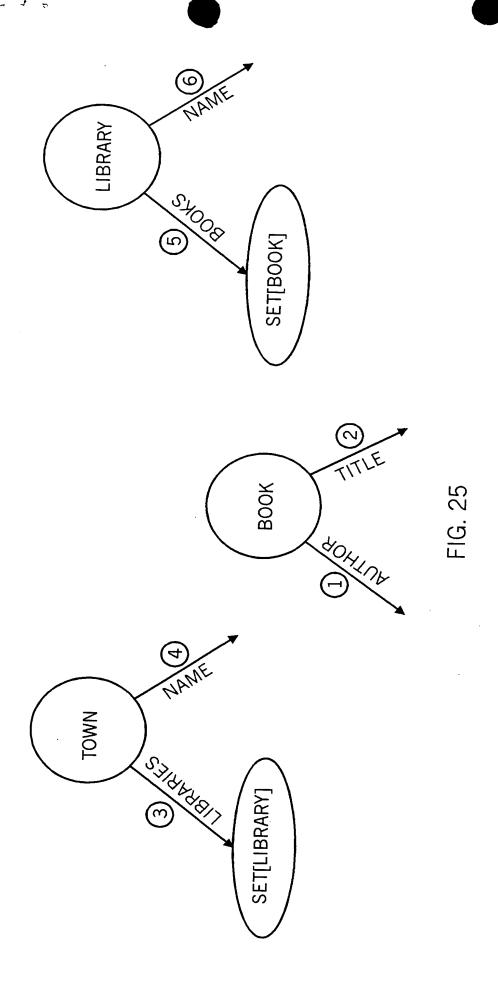

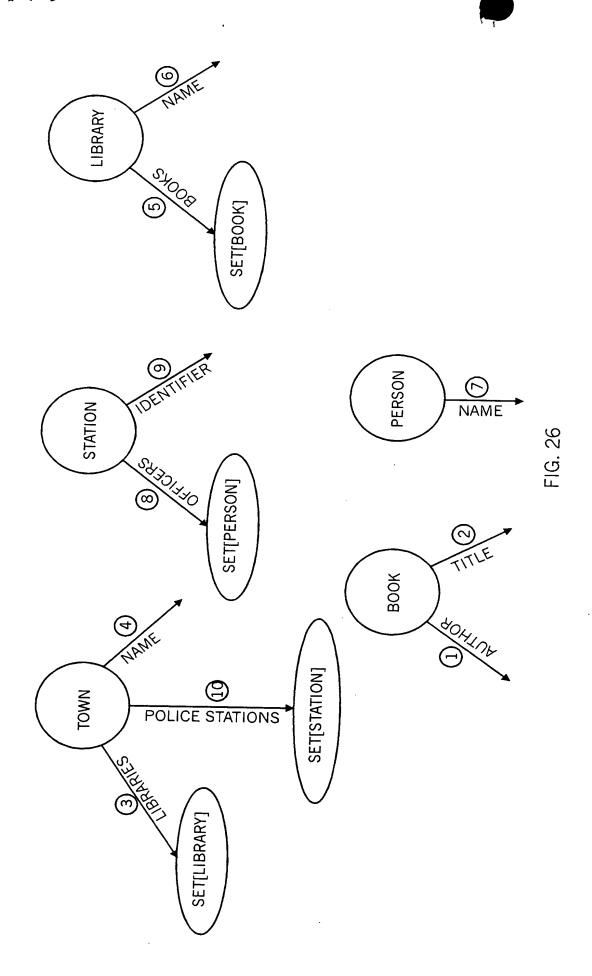

 Airline Integr	ation.oml - Unicorn Coherence	1 - E	nico	rn Co	neren	ce									X P
File Edit New	View Help	용된										1			
	<u>-</u>				♦		*					9		*	
Ba Airlines Project 우 篇 Airline Integr	oct tegration		V A	Map	Comp	Map ComplexType: Journey		urney							
I Test ⊞ •	nstances M. Documents	ments	www.	Mapp	B	Mapping Schema Indo	. E	1252221							_
⊗ XSD Output	Output		<u>V.</u>	Ma	pring	Mapping to Class:	نن							Default Map Properties:	es:
P P XML Schemas	emas	ſ		Œ	Flight				•		Add		Unmap	Default Mapping	
A Mapping	apping	2	ereny.							 					
· BONESCHANGE	湯線器	П				From			Type	ره			T0	To Property	
			 #	φ.	Œ.	airline			Company	any	Ŷ	<un></un>	<ped<< th=""><th></th><th>(d</th></ped<<>		(d
	1088		29	- 6 -	🍦 🔂 arrival	rival			Airport	+	Ŷ	<unwapped></unwapped>	<pad< th=""><th></th><th></th></pad<>		
Flight Info	.			~ б -	6	📠 departure	Q 3		Airport	-	Ŷ	<un><unu< u=""><un><un< u=""><un><un><un><un><un><un><un><un><un><u< th=""><th><ped><ped< p=""></ped<></ped></th><th></th><th>din is Teo</th></u<></un></un></un></un></un></un></un></un></un></un<></un></unu<></un>	<ped><ped< p=""></ped<></ped>		din is Teo
Variation of the second	7			'. W.E.	e O	🔂 distance in miles	in mi	98	xs:float	#	Û	<unwapped></unwapped>	<pre><ped:< pre=""></ped:<></pre>		
moltowasse The Document	100	ş		153	<u>.</u> •				xs:string	jug j	Ŷ	<unwapped></unwapped>	<pre>ped></pre>		
Compan	- A	5			ED ta	📠 take off			xs:date	ஹ	Ŷ	<unmapped></unmapped>	<pad< th=""><th></th><th>tigyo); Lighty</th></pad<>		tigyo); Lighty
				Ma	p This	Map This Field To:	10:				THE STATE OF THE S			的基础是是是是一种的数据的数据的数据,是是是一种的数据数据数据数据数据数据数据数据数据数据数据数据数据数据数据数据数据数据数据	対する
Person					Vew P	New Property	_ [جر]	Exis	ting P	Existing Property		Edit Property	serty	Unmap Property	
			dra <u>ggai</u>	Des	Description:	on:									
			22.22.02	투	e airli	The airline company name.	pany	name.							
			and a												

FIG. 111